




METRIC SERIES (ISO) - HOLLOW PIN CHAINS



METRIC SERIES (ISO) - HOLLOW PIN CHAINS

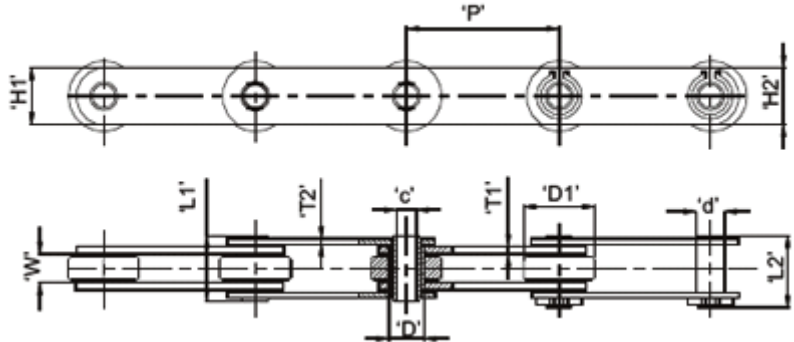

Minimum tensile Strength in lbs	Pitch ('P')	Width between Inner Plates ('W') (Min)	Large roller Dia ('D1')	Bush Dia ('D')	Hollow Pinbore ('C') (Min)	Hollow Pin Dia ('d')	Hollow Pin Length ('L1') (Max)	Connecting Pin Length ('L2') (Max)	Inner Plate		Outer Plate		Avg. Wt/Mtr in (Kg)
									Height ('H1')	Thick ('T1')	Height ('H2')	Thick ('T2')	
28000(MC28)	63.00	20.00	17.50	36.00	8.20	13.00	40.50	43.90	25.00	3.50	25.00	3.50	3.95
	80.00												3.44
	100.00												3.04
	125.00												2.71
	160.00												2.43
56000 (MC56)	80.00	24.00	21.00	50.00	10.20	15.50	46.50	50.00	35.00	4.00	35.00	4.00	6.79
	100.00												5.87
	125.00												5.14
	160.00												4.52
	200.00												4.07
112000 (MC112)	250.00	20.00	36.00	12.50		8.50	41.00	44.60	25.00	3.50	25.00	3.50	3.71
	315.00												4.40
													3.76
													3.30
													2.93
224000 (MC224)	250.00	43.00	41.00	100.00	20.30	31.00	83.00	92.10	70.00	8.00	70.00	8.00	2.60
	350.00												2.36
	400.00												21.96
													18.85
													16.38
													14.32
													12.64