




STAINLESS STEEL CHAINS - EUROPEAN SERIES



Stainless steel (SS 304) chains with solid rollers are designed to offer excellent corrosion resistance and are used in atmosphere where chains are exposed to chemical, water and heat. They can operate in a temperature range of -20 deg c to 400 deg c

STAINLESS STEEL CHAINS - EUROPEAN SERIES

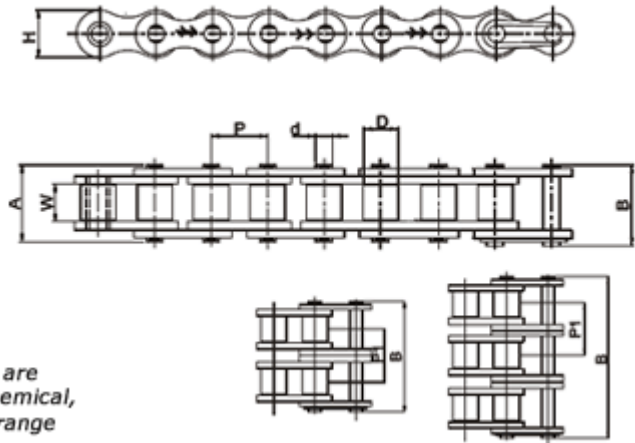

SINGLE STRAND

Intl Ref. No.	ROMBO Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Plate Height (H) (Max)	Bearing Pin Dia (d) (Max)	Width Over Bearing Pin (A) (Max)	Width Over Joint Fasteners (B) (Max)	Transverse Pitch (P1)	Projected Bearing Area (Sq.cm)	Avg. Weight Per Metre (Kg)	Tensile Strength (KN) (Min)
05B-1	D05B01SS01	8.00	3.00	5.00	7.10	2.31	8.60	11.70	-	0.11	0.39	3.50
06B-1*	D06101SS01	9.525	5.72	6.35	8.20	3.28	13.50	16.80	-	0.28	0.44	6.65
08B-1	D08301SS01	12.70	7.75	8.51	11.80	4.45	17.00	20.90	-	0.50	0.70	12.00
10B-1	D10101SS01	15.875	9.65	10.16	14.70	5.08	19.60	23.70	-	0.67	0.92	15.00
12B-1	D12001SS01	19.05	11.68	12.07	16.10	5.72	22.70	27.30	-	0.88	1.12	17.00
16B-1	D160 01SS 01	25.40	17.02	15.88	21.00	8.27	36.10	41.50	-	2.07	2.59	40.00

DOUBLE STRAND

Intl Ref. No.	ROMBO Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Plate Height (H) (Max)	Bearing Pin Dia (d) (Max)	Width Over Bearing Pin (A) (Max)	Width Over Joint Fasteners (B) (Max)	Transverse Pitch (P1)	Projected Bearing Area (Sq.cm)	Avg. Weight Per Metre (Kg)	Tensile Strength (KN) (Min)
06B-2*	D06102SS01	9.525	5.72	6.35	8.20	3.28	23.80	27.10	10.24	0.56	0.74	0.74
08B-2	D08302SS01	12.70	7.75	8.51	11.80	4.45	31.00	34.90	13.92	1.00	1.40	1.40
10B-2	D10102SS01	15.875	9.65	10.16	14.70	5.08	36.20	40.30	16.59	1.34	3.00	3.00
12B-2	D12002SS01	19.05	11.68	12.07	16.10	5.72	42.20	46.80	19.46	1.76	2.21	2.21
16B-2	D160 02 SS 01	25.40	17.02	15.88	21.00	8.27	68.00	73.40	31.88	4.14	5.08	5.08



Intl Ref. No.	ROMBO Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Plate Height (H) (Max)	Bearing Pin Dia (d) (Max)	Width Over Bearing Pin (A) (Max)	Width Over Joint Fasteners (B) (Max)	Transverse Pitch (P1)	Projected Bearing Area (Sq.cm)	Avg. Weight Per Metre (Kg)	Tensile Strength (KN) (Min)
06B-3*	D06103SS01	9.525	5.72	6.35	8.20	3.28	34.00	37.30	10.24	0.84	1.11	17.85
08B-3	D08303SS01	12.70	7.75	8.51	11.80	4.45	44.90	48.80	13.92	1.00	1.31	35.30
10B-3	D10103SS01	15.875	9.65	10.16	14.70	5.08	52.80	56.90	16.59	1.34	1.79	42.65
12B-3	D12003SS01	19.05	11.68	12.07	16.10	5.72	61.70	66.30	19.46	1.76	2.22	50.05
16B-3	D160 03 SS 01	25.40	17.02	15.88	21.00	8.27	99.90	105.30	31.88	4.14	5.03	117.65

* Straight Contour

Note : Straight side Plate Stainless Steel Chains are also available.

Spares available for all models.

TIDC India e-mail : exports@tidc.murugappa.com