




STAINLESS STEEL CHAINS - AMERICAN SERIES



STAINLESS STEEL CHAINS - AMERICAN SERIES

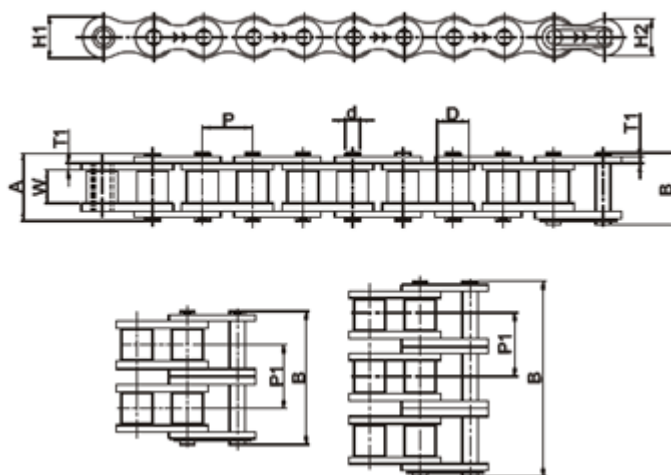

SINGLE STRAND

Intl Ref. No.	ROMBO Chain No.	Pitch (P)	Width Between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Plate Height		Plate Height		Bearing Pin Dia (d) (Max)	Width Over Bearing Pin (A) (Max)	Width Over Joining Fasteners (B) (Max)	Transverse Pitch (P1)	Projected Bearing Area (Sq.cm)	Avg. Weight Per Metre (Kg)	Tensile Strength (KN) (Min)
					IP H1 (Max)	OP H2 (Max)	IP H1 (Max)	OP H2 (Max)							
35-1	B 06A 01 SS 01	9.525	4.68	5.08	8.65	7.48	1.25	1.25	3.59	12.18	13.18	-	0.27	0.33	6.00
40-1	D 08A 01 SS 01	12.70	7.85	7.92	12.00	10.40	1.50	1.50	3.96	17.80	21.80	-	0.44	0.63	11.00
50-1	D 102 01 SS 01	15.875	9.40	10.16	15.00	13.00	2.00	2.00	5.08	21.80	25.90	-	0.71	1.04	17.00
60-1	D 121 01 SS 01	19.05	12.58	11.91	18.00	16.60	2.40	2.40	5.94	26.90	31.50	-	1.04	1.53	1.53 24.80
80-1	D 161 01 SS 01	25.40	15.75	15.88	24.10	20.80	3.00	3.00	7.92	33.50	38.90	-	1.77	2.59	41.00

DOUBLE STRAND

Intl Ref. No.	ROMBO Chain No.	Pitch (P)	Width Between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Plate Height		Plate Height		Bearing Pin Dia (d) (Max)	Width Over Bearing Pin (A) (Max)	Width Over Joining Fasteners (B) (Max)	Transverse Pitch (P1)	Projected Bearing Area (Sq.cm)	Avg. Weight Per Metre (Kg)	Tensile Strength (KN) (Min)
					IP H1 (Max)	OP H2 (Max)	IP H1 (Max)	OP H2 (Max)							
40-2	D 08A 02 SS 01	12.70	7.85	7.92	12.00	10.40	1.50	1.50	3.96	32.30	36.20	14.38	0.88	1.25	22.00
50-2	D 102 02 SS 01	15.875	9.40	10.16	15.00	13.00	2.00	2.00	5.08	37.90	44.00	18.11	1.42	2.05	34.00
60-2	D 121 02 SS 01	19.05	12.58	11.91	18.00	16.60	2.40	2.40	5.94	49.80	54.40	22.78-	2.08	3.01	49.60
80-2	D 161 02 SS 01	25.40	15.75	15.88	24.10	20.80	3.00	3.00	7.92	62.70	68.10	29.29	3.54	4.17	82.00



Intl Ref. No.	ROMBO Chain No.	Pitch (P)	Width Between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Plate Height		Plate Height		Bearing Pin Dia (d) (Max)	Width Over Bearing Pin (A) (Max)	Width Over Joining Fasteners (B) (Max)	Transverse Pitch (P1)	Projected Bearing Area (Sq.cm)	Avg. Weight Per Metre (Kg)	Tensile Strength (KN) (Min)
					IP H1 (Max)	OP H2 (Max)	IP H1 (Max)	OP H2 (Max)							
40-3	D 08A 03 SS 01	12.70	7.85	7.92	12.00	10.40	1.50	1.50	3.96	45.30	49.20	14.38	1.32	1.90	33.00
50-3	D 102 03 SS 01	15.875	9.40	10.16	15.00	13.00	2.00	2.00	5.08	56.80	60.90	18.11	2.13	3.12	51.00
60-3	D 121 03 SS 01	19.05	12.58	11.91	18.00	16.60	2.40	2.40	5.94	72.60	77.20	22.78	3.12	4.58	74.40
80-3	D 161 03 SS 01	25.40	15.75	15.88	24.10	20.80	3.00	3.00	7.92	91.90	97.10	29.29	5.31	6.04	123.00

Note: Spares available for all models.

TIDC India e-mail : exports@tidc.murugappa.com