


AGRICULTURAL ROLLER CHAINS



ISO 437/DIN 6189

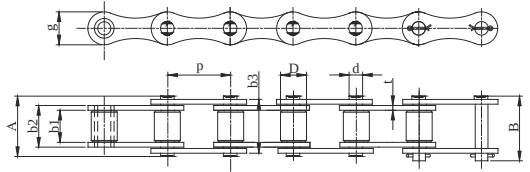

EUROPEAN STANDARD

Intl. Ref. No.	Rombo Chain No.	Pitch P	Width between Inner Plates b1 (Min)	Roller Dia. D (Max)	Width over Inner Plates b2 (Max)	Width over Outer Plates b3 (Max)	Bearing Pin Dia. d (Max)	Width over Bearing Pin A (Max)	Width over Joint Fastener B (Max)	Link Plate Height g (Max)	Link Plate Thick t (Nom)	Bearing Area (sq.cm)	Average Weight per Metre (kg)	Tensile Strength	
														Min (N)	Avg (N)
S32	U 29211	29.21	15.88	11.43	20.19	24.30	4.45	26.70	29.30	13.30	1.75	0.90	0.76	8000	19800
S42	U 34931	34.93	19.05	14.27	25.40	31.20	7.01	34.20	36.20	19.70	2.60	1.78	1.61	27000	44250
S45	U 41401	41.40	22.23	15.24	28.50	34.50	5.72	38.10	40.70	17.20	2.60	1.64	1.46	18000	33500
S52	U 38101	38.10	22.23	15.24	28.50	34.50	5.72	38.10	40.70	17.20	2.60	1.64	1.56	18000	33500
S55	U 41402	41.40	22.23	17.78	28.50	34.50	5.72	40.60	40.70	17.20	2.60	1.64	1.65	18000	33500
S62	U 41911	41.91	25.40	19.05	31.70	37.60	5.72	40.55	43.20	17.20	2.60	1.82	1.87	27000	34500
S77	U 58341	58.34	22.23	18.26	30.90	40.05	8.92	43.90	48.40	26.20	4.00	2.78	2.57	45000	71000
S88	U 66271	66.27	28.58	22.86	37.52	46.35	8.92	50.80	54.80	26.20	4.00	3.35	3.26	45000	71000

Bush chain also available



INNER LINK



OUTER LINK



CONNECTING LINK
SECURED WITH SPLIT PIN



CONNECTING LINK
SECURED WITH WIRE



OFFSET LINK
SECURED WITH SPLIT PIN



OFFSET LINK
SECURED WITH WIRE

Above spares are available for all models