


AGRICULTURAL ROLLER CHAINS



ISO 487/DIN 8189/ASME B29.19M

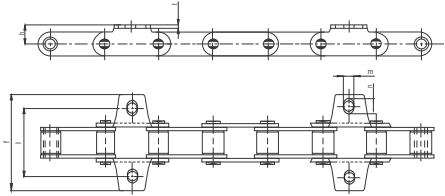


AMERICAN STANDARD


'K' ATTACHMENTS

Chain No.	TIDC Att.No.	Attachments		Dimensions						Fig. No
		Outer	Inner	l	f	m	n	h	t	
CA550	K1	✓	✓	54.00	75.60	8.30	-	12.70	2.60	1
	K2	✓		50.80	75.60	8.30	-	12.70	2.60	1
	K3	✓	✓	50.80	75.60	8.30	11.50	12.70	2.60	1
	K5	✓		59.80	75.60	9.00 Sq.	-	12.70	2.60	1
	K6	✓		50.80	72.00	9.90	-	12.70	2.60	2
	K7	✓		54.00	75.60	8.50	-	12.70	2.60	3
	K8	✓	✓	50.80	75.60	6.75	-	12.70	2.60	1
	K9	✓		50.80	68.50	8.30	-	14.70	2.60	1
	KA	✓		50.80	72.00	8.50	-	12.70	2.60	2
	KB	✓		58.00	82.00	8.50	10.00	12.00	2.60	4
	KC	✓		50.80	75.00	8.75	-	12.70	2.60	1
CA557	KD	✓		74.60	105.60	10.35	-	16.00	4.70	5
	K1	✓		74.60	105.60	10.35	-	16.00	4.70	5
	K4	✓		57.15	78.00	13.50	-	12.70	3.15	2
	K6	✓		53.85	78.00	10.00	12.85	12.70	3.15	2
	K7	✓		50.80	78.00	10.00	-	12.70	3.15	2
	K8	✓		57.00	78.00	10.00	-	12.70	3.15	2
CA620	KB	✓		53.85	78.00	12.70	-	12.70	3.15	2
	K1	✓		81.60	113.00	10.00	-	14.00	3.15	6

'M' Attachments are also available




INNER LINK



OUTER LINK



CONNECTING LINK
SECURED WITH SPLIT PIN



CONNECTING LINK
SECURED WITH WIRE

Above spares are available for all models

'K' ATTACHMENTS




Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5




Fig. 6