




EUROPEAN SERIES (BS) - HOLLOW PIN CHAINS



EUROPEAN SERIES (BS) - HOLLOW PIN CHAINS

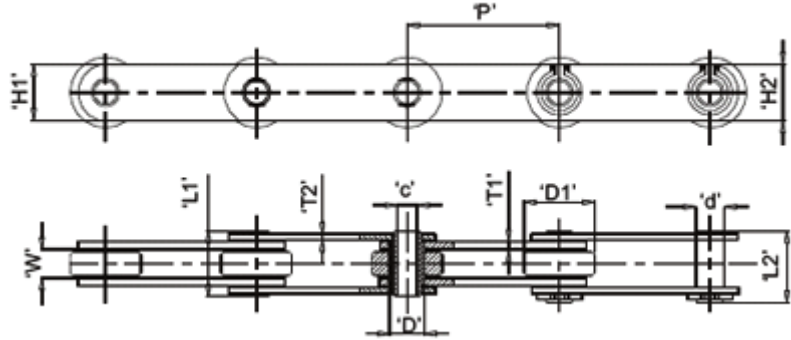

Minimum tensile Strength in lbs	Pitch ('P')		Width between Inner Plates ('W') (Min)	Large roller Dia ('D1')	Bush Dia ('D')	Hollow pin bore ('C') (Min)	Hollow pin Dia ('d')	Hollow pin length ('L1') (Max)	Connecting pin length ('L2') (Max)	Inner Plate		Outer Plate		Avg. Wt/Mtr in (Kg)
	INCH	METRIC								Height ('H1')	Thick ('T1')	Height ('H2')	Thick ('T2')	
6000	2.0	50.80	15.00	31.80	18.00	10.10	14.00	36.50	38.90	25.40	3.80	25.40	3.80	3.68
	2.5	63.50												3.29
	3.0	76.20												3.02
	4.0	101.60												2.71
	5.0	127.00												2.51
	6.0	152.40												2.38
12000	2.0	50.80	19.00	47.60	23.60	13.20	19.00	45.60	47.50	38.10	5.10	38.10	3.80	5.49
	3.0	76.20												7.28
	4.0	101.60												6.21
	5.0	127.00												5.57
	6.0	152.40												5.13
	7.0	177.80												4.83
	8.0	203.20												4.61
	9.0	228.60												4.42
24000	4.0	101.60	25.40	66.67	33.20	20.10	26.90	57.00	60.50	51.00	7.10	51.00	5.10	13.16
	5.0	127.00												11.58
	6.0	152.40												11.27
	7.0	177.80												9.77
	8.0	203.20												9.21
	9.0	228.60												8.78
	12.0	304.80												7.90
36000	5.0	127.00	38.10	88.90	38.10	23.10	31.80	79.50	84.00	61.00	8.90	61.00	7.60	25.47
	6.0	152.40												22.62
	7.0	177.80												20.58
	8.0	203.20												19.05
	9.0	228.60												17.87
	12.0	304.80												15.49